


STANDARD OIL WATER SEPARATOR EQUIPMENT

1.	150 lb. R.F. INLET / OUTLET FLANGES
2.	LAMINAR FLOW PLATE
3.	SLUDGE BAFFLE
4.	SEDIMENT CHAMBER
5.	STRIKER PLATE
6.	COALESCING PLATE PACK
7.	REMOVABLE PLATES
8.	4" OUTLET PIPE
9.	2"Ø VENT FITTING
10.	2"Ø LEVEL MONITOR FITTING
11.	4" NPT FOR OIL PUMP OUT ACCESS
12.	24"Ø MANWAY FOR SEPARATOR AND PLATE PACK ACCESS
13.	3/4" FCPLG FOR ELECTRICAL PASS-THRU


SURFACE PREP S.S.P.C. NO. 6 BLAST EXTERIOR SURFACES

EXTERIOR COATING:
THICKNESS: 100 MILS - SHELL
THICKNESS: 100 MILS - HEAD


INTERIOR COATING:
OPTIONAL

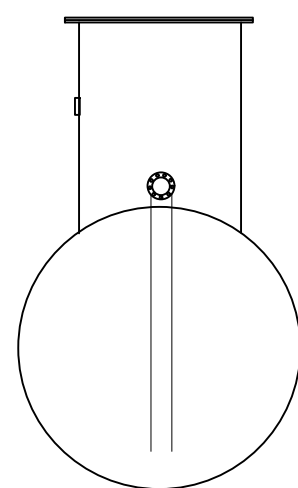


B - B

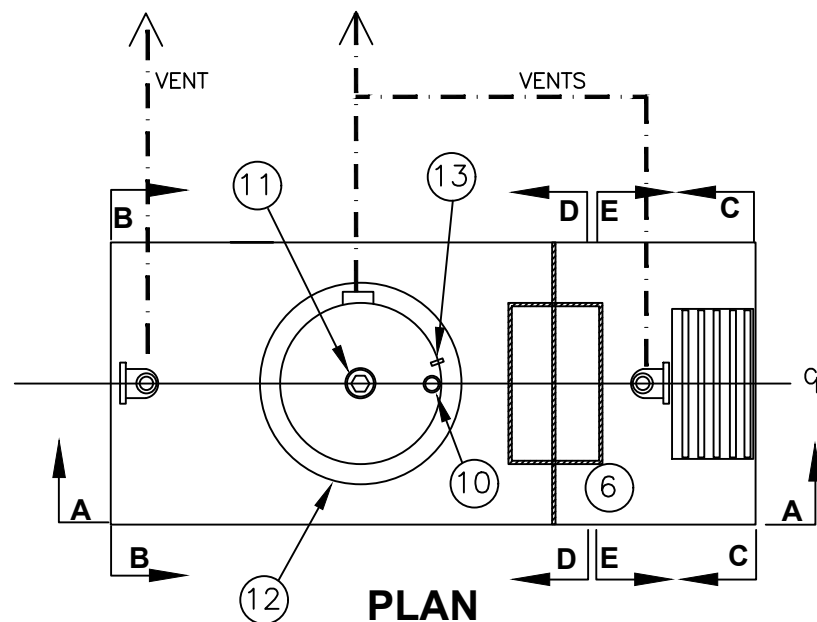


PLAN

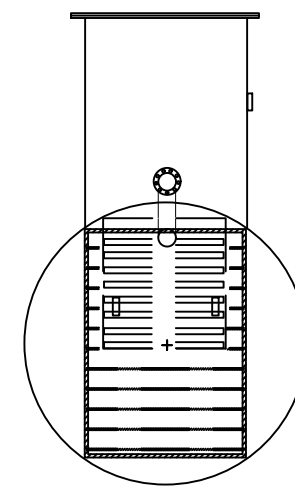


C - C

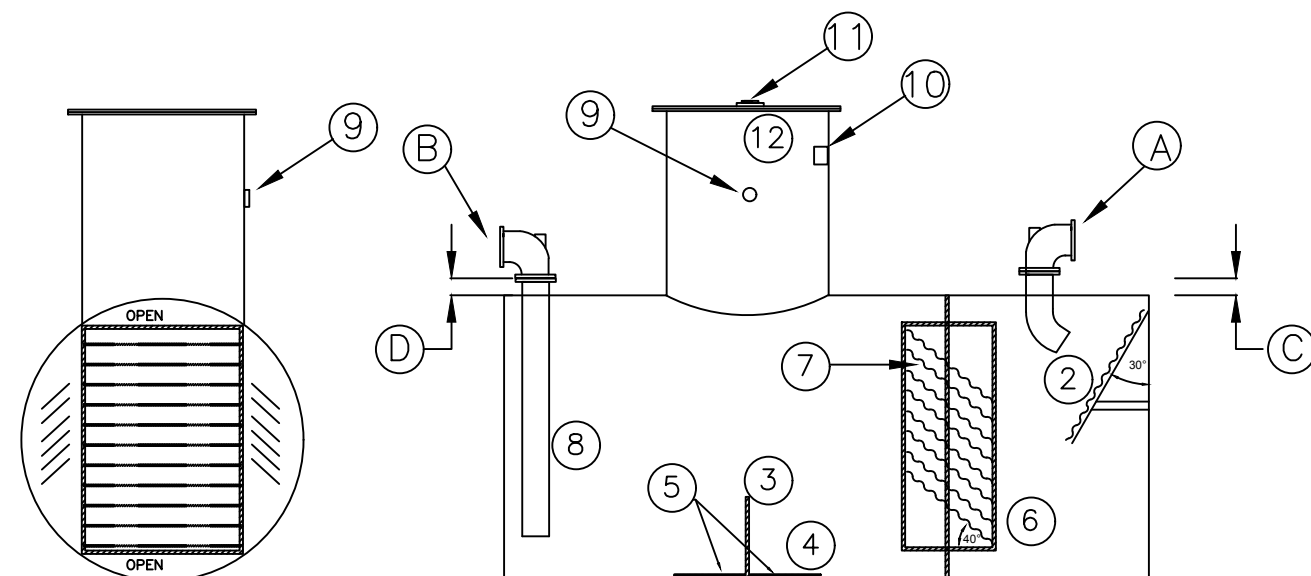

A - A

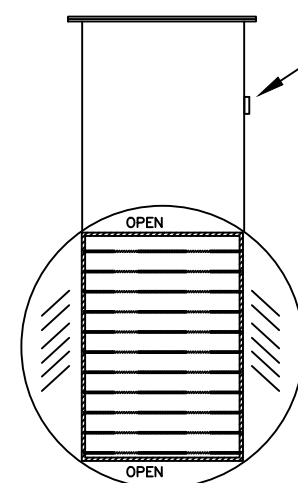

D - D



E - E

MODEL NO.	FLOW RATE	OIL STORAGE	SPILL CAPACITY	DIAMETER	LENGTH	STEEL THICKNESS	A I.D.	B I.D.	C Height	D Height	Weight Lbs.
429615-50	50	220	400	3'-6"	8'-0"	7GA.	4"	4"	8"	4"	1200
5012015-100	100	400	750	4'-2"	10'-0"	7GA.	6"	6"	8"	4"	1800

**NOTE: Inlets, outlets and manways must be vented.
Failure to vent outlet can result in the syphoning of the unit.**



725 Main Street
Suwanee, GA 30024
770.945.8383



Low flow 15 PPM
Oil/Water Separator
Single-wall

Date: 10/14/24

All rights reserved. This drawing or any part thereof must not be reproduced in any form without the written permission of Metal Products Company.

Dwg. No.

LF-15